

## AWI 58

- ▶ Incremental rotary encoder with shaft and high degree of protection
- ▶ Compact design for highest industrial requirements
- ▶ International standard
- ▶ Also available in stainless steel for aggressive environmental conditions
- ▶ Accessories from page 70

### Electrical specifications

max. pulse frequency:	100 kHz
Perm. temperature range:	-30°... +70° C
Power supply:	10V... 30V DC
Max. current consumption:	80 mA (without load)
Max. output load:	30 mA (per channel)
Residual ripple:	max. ± 5% UB
Power supply:	5V DC ± 5%
Max. current consumption:	80 mA
Max. output load:	30 mA (per channel)



### Mechanical specifications

Flange:	Aluminium
Housing:	Zinc die-casting
Shaft:	stainless steel
Shaft seal:	Oil/Salt-water resistant
Bearing:	Deep groove ball bearing
Weight:	approx. 0.4 kg
Protection type:	IP 65
Max. speed:	6000 U/min
Torque:	approx. 3 Ncm
Max. shaft load:	axial 15 N/radial 30 N


### Mechanical dimensions

A	B	C
6 mm	10 mm	9.5 mm
6.35 mm	10 mm	9.5 mm
8 mm	20 mm	15 mm
9.52 mm	20 mm	15 mm
10 mm	20 mm	15 mm
12 mm	25 mm	20 mm

\* Tolerance = fg 6

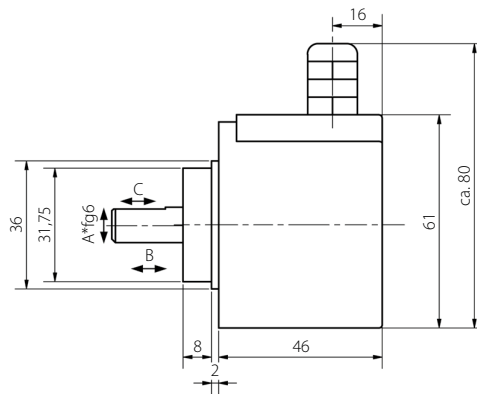

## Output circuits

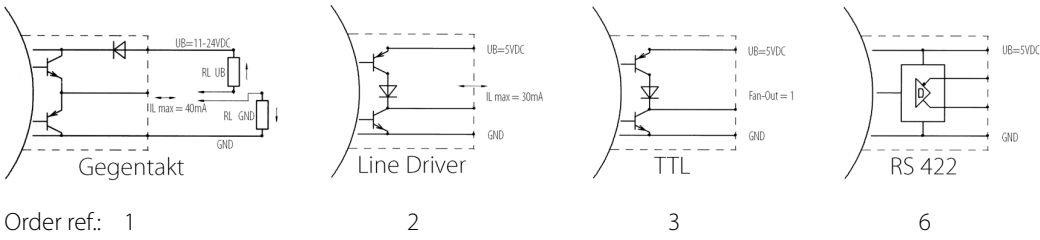


Order ref.: 1

2

3

6

## Signal outputs

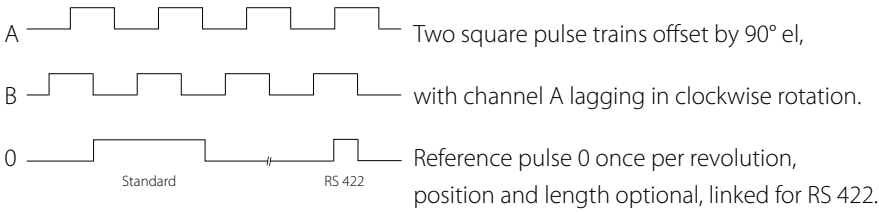

All channels can also be executed inversely.

## Pin configuration

	GND	+ U <sub>B</sub>	A	B	$\bar{A}$	$\bar{B}$	0	$\bar{0}$
Connection type 00 (Colour code according to DIN 47100)	white	brown	green	yellow			grey	
Connection type 00 (Colour code according to DIN 47100)	white	brown	green	yellow	grey	pink	blue	red
Connection type 01	black	blue	brown	beige			yellow	
Connection type 01	black	blue	brown	beige	yellow	green	pink	purple
Connection type 05	1	2	3	4				
Connection type 08, 09	1	2	3	4	(5)		5	
Connection type 10, 11	1	2	3	4	(5)	(6)	5	6
Connection type 12	1	2	3	4	5	6	7	8
Connection type 52	A	B	C	D	E	F	G	

## Order reference

